



OIL TUBE SKIMMERS

Oil tube skimmers – mechanical equipment for removing oil, grease and oil products from the surface of water, coolants, emulsions, washing solutions, wastewater.



Working principle of **tube skimmers** for collecting oil products:
Oil, grease, oil products, located on the surface of the liquid, stick to the outer surface of a special collector pipe. This collector pipe of tube skimmer, together with oil, fat, oil products, is drawn into the oil trap. Oil takers remove contaminants from the surface of the collector pipe.

THESE SKIMMERS ARE USED FOR:


- sewage tanks (settlers);
- oil receiving wells;
- separators;
- circulating systems for washing parts and assemblies;
- grease traps of food production and enterprises total. food;
- industrial sedimentation tanks, sludge pits;
- heat treatment equipment;
- washers and washing parts;
- cleaning coolant from free oil.





ECONAD

OIL TUBE SKIMMERS

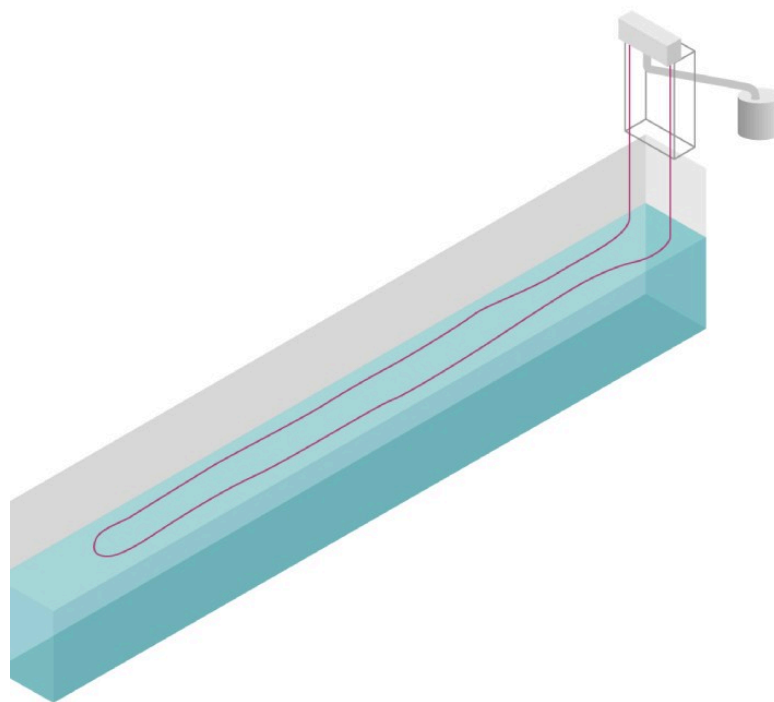

Model.	XENA SKM 500	XENA SKM 240	XENA SKM 50
Productivity, l/h.	up to 500	up to 240	up to 50
Collector tube, mm	ø21.5	ø21.5	ø18
Power consumption, W	180	180	120-180
Power supply, V	230/1-phase – 400/3-phase	230/1-phase – 400/3-phase	230/1-phase – 400/3-phase
Drainage pipe, mm	ø63	ø63	ø25 (outside), ø22 (inside)
Operating temperature, °C	-20/+90	-20/+90	-20/+90
Size of the skimmer body, mm	500x250x290	500x250x290	500x250x290
Weight, kg	up to 16.5	up to 16.5	up to 10.5
Button (on/off)	is	is	is
Fasteners	“Easy mounting” with 2 bolts. Rack with magnet (optional)		
Special equipment	timer (optional)		



E-mail: econadin@ukr.net
 contact@econadin.com
 Skype: econad.sie
 Web: www.econadin.com, www.econad.com.ua

